


3V AM / FM 1CHP TUNER IC

TA8167N is the AM / FM 1chip tuner IC, which is designed for Portable radios and 3V Headphone radios.


FEATURES

- Built-in
FM F/E, AM / FM IF and FM MPX
- AM Detector Coil and IF Coupling Condenser are not needed.
- S curve characteristics of FM detection output is Reverse characteristic.
- The FM Local Oscillation Voltage is set up low relatively for measures against FM radiation.
- Operating Supply Voltage Range
 $V_{CC} = 1.8 \sim 7.0V$ ($T_a = 25^\circ C$)

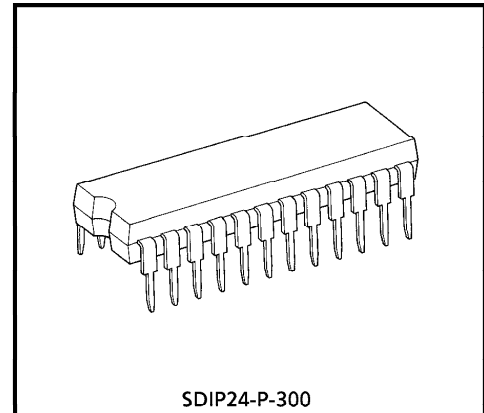








Weight : 1.2g (Typ.)

BLOCK DIAGRAM

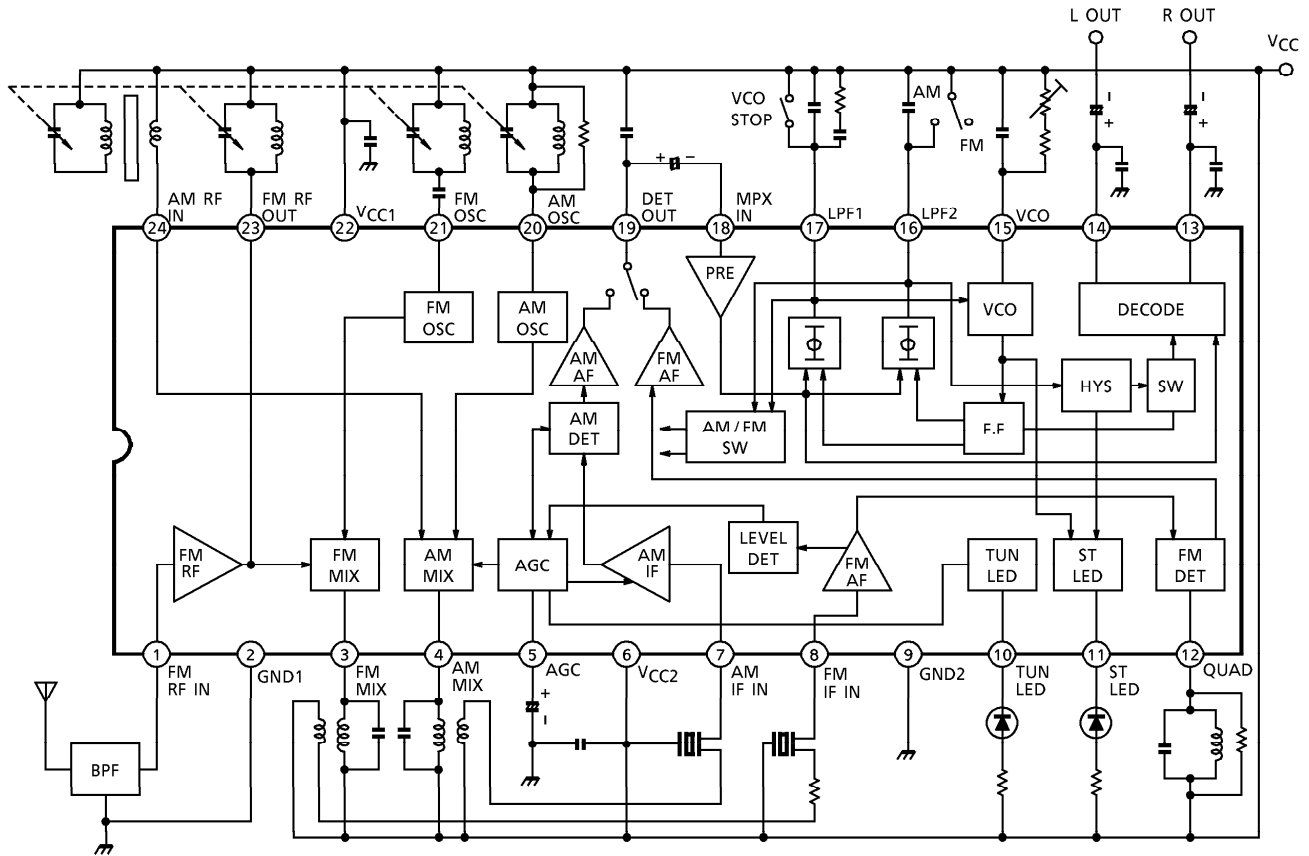

EXPLANATION OF TERMINALS

| PIN No. | SYMBOL | INTERNAL CIRCUIT | DC VOLTAGE (V) (AT NO SIGNAL) | |
|---------|-----------------------------|------------------|----------------------------------|-----|
| | | | AM | FM |
| 1 | FM-RF IN | | 0 | 0.7 |
| 2 | GND1 (GND for RF Stage) | — | 0 | 0 |
| 3 | FM MIX | | 3.0 | 3.0 |
| 4 | AM MIX | | 3.0 | 3.0 |
| 5 | AGC (AM AGC) | | 0 | 0 |
| 6 | VCC2 (VCC for IF/MPX Stage) | — | 3.0 | 3.0 |
| 7 | AM IF IN | | 3.0 | 3.0 |
| 8 | FM IF IN | | 3.0 | 3.0 |
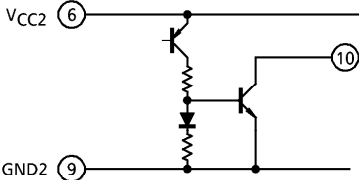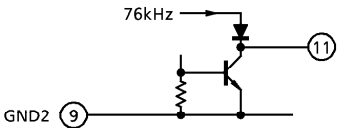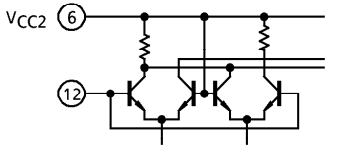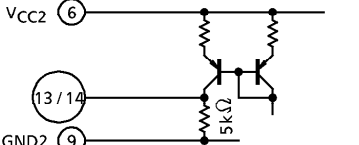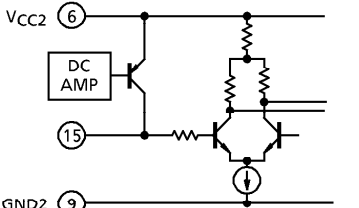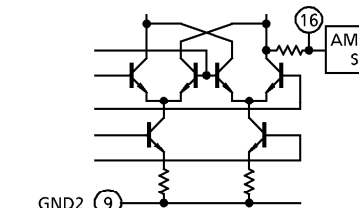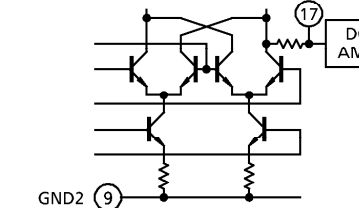
| PIN No. | SYMBOL | INTERNAL CIRCUIT | DC VOLTAGE (V) (AT NO SIGNAL) | |
|----------|---|--|----------------------------------|-------------------------------|
| | | | AM | FM |
| 9 | GND2 (GND for IF/MPX Stage) | — | 0 | 0 |
| 10 | TUN LED (Tuning LED) |  | — | — |
| 11 | ST LED (Stereo LED) |  | — | — |
| 12 | QUAD (FM QUAD, Detector) |  | 3.0 | 3.0 |
| 13 14 | R-OUT (R-ch Output) L-OUT (L-ch Output) |  | 1.0 | 1.0 |
| 15 | VCO |  | 2.5 | 2.5 (VCO STOP MODE) |
| 16 | LPF2 ● LPF Terminal for Synchronous Detector ● Bias Terminal for AM/FM SW Circuit V ₁₆ = V _{CC} → AM (VCO Stop) V ₁₆ = Open → FM |  | 3.0 | 2.2 (VCO STOP MODE) 2.7 |
| 17 | LPF1 ● LPF Terminal for Phase Detector ● VCO Stop Terminal V ₁₇ = V _{CC} → VCO Stop |  | 2.7 | 2.2 |

| PIN No. | SYMBOL | INTERNAL CIRCUIT | DC VOLTAGE (V) (AT NO SIGNAL) | |
|---------|--|------------------|----------------------------------|-----|
| | | | AM | FM |
| 18 | MPX IN | | 0.7 | 0.7 |
| 19 | DET OUT | | 1.5 | 1.2 |
| 20 | AM OSC | | 3.0 | 3.0 |
| 21 | FM OSC | | 3.0 | 3.0 |
| 22 | V _{CC} L (V _{CC} for RF Stage) | — | 3.0 | 3.0 |
| 23 | FM RF OUT | cf. pin① | 3.0 | 3.0 |
| 24 | AM RF IN | | 3.0 | 3.0 |

MAXIMUM RATINGS (Ta = 25°C)

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|-----------------------|-----------------------|---------|------|
| Supply Voltage | V _{CC} | 8 | V |
| LED Current | I _{LED} | 10 | mA |
| LED Voltage | V _{LED} | 8 | V |
| Power Dissipation | P _D (Note) | 1200 | mW |
| Operating Temperature | T _{opr} | -25~75 | °C |
| Storage Temperature | T _{stg} | -55~150 | °C |

(Note) Derated above Ta = 25°C in the proportion of 9.6mW/°C.


ELECTRICAL CHARACTERISTICS

Unless otherwise specified, Ta = 25°C, V_{CC} = 3V, F/E : f = 83MHz, f_m = 1kHz
 FM IF : f = 10.7MHz, Δf = ±22.5kHz, f_m = 1kHz
 AM : f = 1MHz, MOD = 30%, f_m = 1kHz
 MPX : f_m = 1kHz

| CHARACTERISTIC | | SYMBOL | TEST CIR-CUIT | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|------------------------------------|---------------------------|--------------------------|---------------|---|------|------|------|-----------------------|
| Supply Current | | I _{CC} (FM) | 1 | V _{in} = 0, FM Mode | — | 13.2 | 20.0 | mA |
| | | I _{CC} (AM) | 1 | V _{in} = 0, AM Mode | — | 8.4 | 13.5 | |
| F/E | Input Limiting Voltage | V _{in} (lim) | 1 | -3dB Limiting | — | 10.0 | — | dB _μ V EMF |
| | Local OSC Voltage | V _{OSC} | 2 | f _{OSC} = 72.3MHz | — | 70 | — | mV _{rms} |
| FM IF | Input Limiting Voltage | V _{in} (lim) IF | 1 | -3dB Limiting | 40 | 46 | 53 | dB _μ V EMF |
| | Recovered Output Voltage | V _{OD} | 1 | V _{in} = 80dB _μ V EMF | 55 | 80 | 110 | mV _{rms} |
| | Signal To Noise Ratio | S/N | 1 | V _{in} = 80dB _μ V EMF | — | 70 | — | dB |
| | Total Harmonic Distortion | THD | 1 | V _{in} = 80dB _μ V EMF | — | 0.4 | — | % |
| | AM Rejection Ratio | AMR | 1 | V _{in} = 80dB _μ V EMF | — | 32 | — | dB |
| | Lamp ON sensitivity | V _L | 1 | I _L = 1mA | 45 | 51 | 56 | dB _μ V EMF |
| AM | Gain | G _V | 1 | V _{in} = 26dB _μ V EMF | 40 | 70 | 110 | mV _{rms} |
| | Recovered Output Voltage | V _{OD} | 1 | V _{in} = 60dB _μ V EMF | 55 | 80 | 110 | mV _{rms} |
| | Signal To Noise Ratio | S/N | 1 | V _{in} = 60dB _μ V EMF | — | 42 | — | dB |
| | Total Harmonic Distortion | THD | 1 | V _{in} = 60dB _μ V EMF | — | 1.0 | — | % |
| | Lamp ON Sensitivity | V _L | 1 | I _L = 1mA | 20 | 25 | 30 | dB _μ V EMF |
| Pin ^⑨ Output Resistance | | R ₁₉ | — | FM Mode | — | 0.75 | — | kΩ |
| | | | | AM Mode | — | 12.5 | — | |

| CHARACTERISTIC | | SYMBOL | TEST CIR-CUIT | TEST CONDITION | MIN. | TYP. | MAX. | UNIT | |
|------------------------|-------------------------------------|-------------------------------|----------------|---|---|---------|------|------------|------------|
| MPX | Input Resistance | R_{IN} | — | — | — | 24 | — | $k\Omega$ | |
| | Output Resistance | R_{OUT} | — | — | — | 5 | — | $k\Omega$ | |
| | Max. Composite Signal Input Voltage | $V_{in \text{ max}}$ (STEREO) | 1 | L + R = 90%, P = 10%, $f_m = 1\text{kHz}$, THD = 3% | — | 350 | — | mV_{rms} | |
| | Separation | Sep | 1 | L + R = $135mV_{rms}$ P = $15mV_{rms}$ | $f_m = 100\text{Hz}$ | — | 42 | — | dB |
| | | | | | $f_m = 1\text{kHz}$ | 35 | 42 | — | |
| | | | | | $f_m = 10\text{kHz}$ | — | 42 | — | |
| | Total Harmonic Distortion | Monaural | THD (MONAURAL) | 1 | $V_{in} = 150mV_{rms}$ | — | 0.2 | — | % |
| | | Stereo | THD (STEREO) | | L + R = $135mV_{rms}$, P = $15mV_{rms}$ | — | 0.2 | — | |
| | Voltage Gain | | G_V (MPX) | 1 | $V_{in} = 150mV_{rms}$ | -5 | -3 | -1 | dB |
| | Channel Balance | | C.B. | 1 | $V_{in} = 150mV_{rms}$ | -2 | 0 | 2 | dB |
| | Stereo Lamp Sensitivity | ON | V_L (ON) | 1 | Pilot Input | — | 8 | 16 | mV_{rms} |
| | | OFF | V_L (OFF) | | | 2 | 6 | — | |
| Stereo Lamp Hysteresis | | V_H | 1 | To LED turn off from LED turn on | — | 2 | — | mV_{rms} | |
| Capture Range | | C.R. | 1 | P = $15mV_{rms}$ | — | ± 3 | — | % | |
| Signal To Noise Ratio | | S/N | 1 | — | — | 70 | — | dB | |


TEST CIRCUIT 1

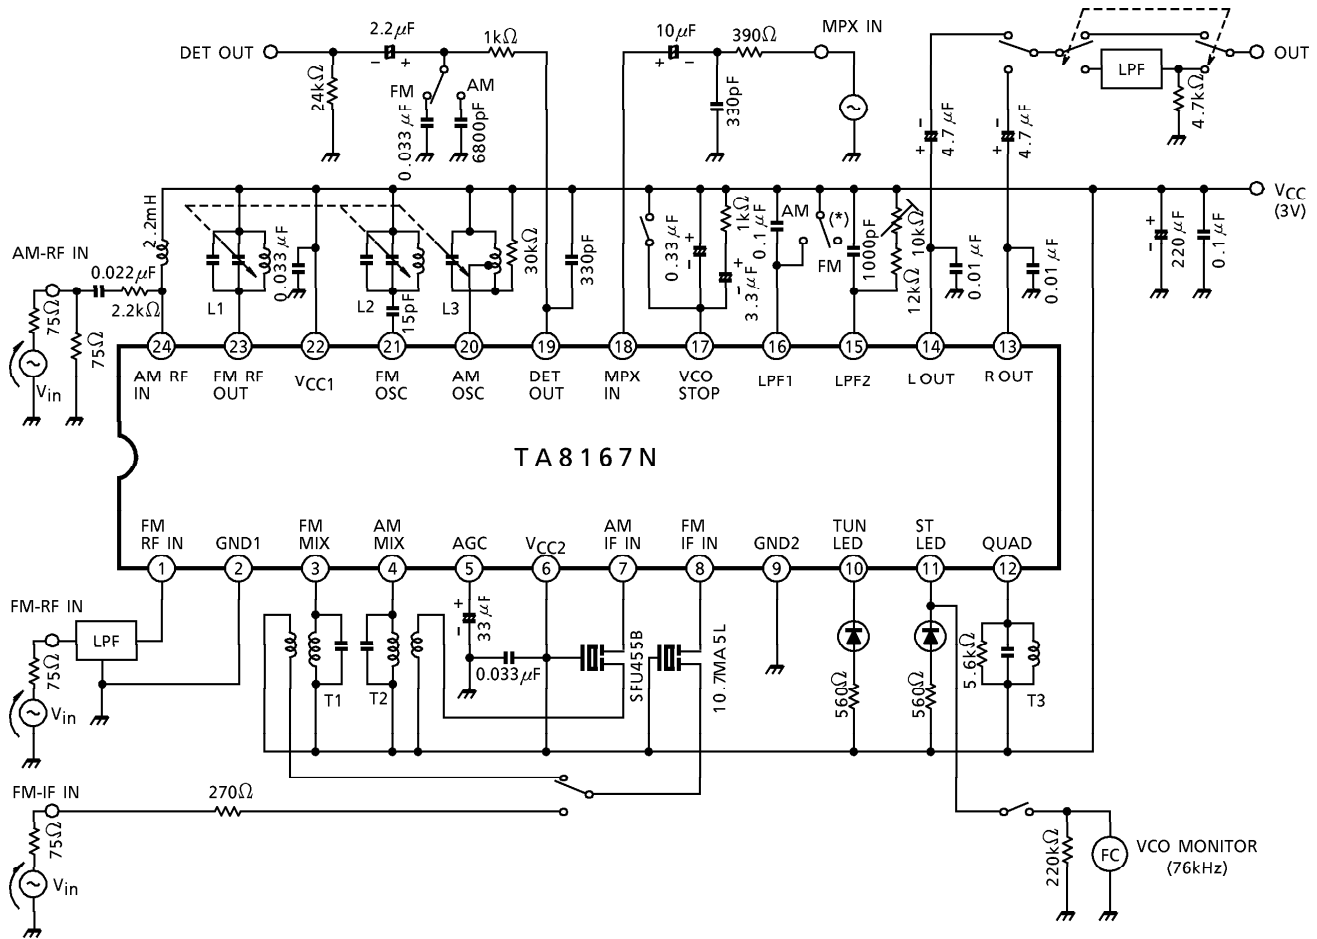

(*) POLYESTER FILM CONDENSER

Using other types of condensers, there are some cases that the MPX does not do normal stereo action at high temperature or low temperature.


TEST CIRCUIT 2

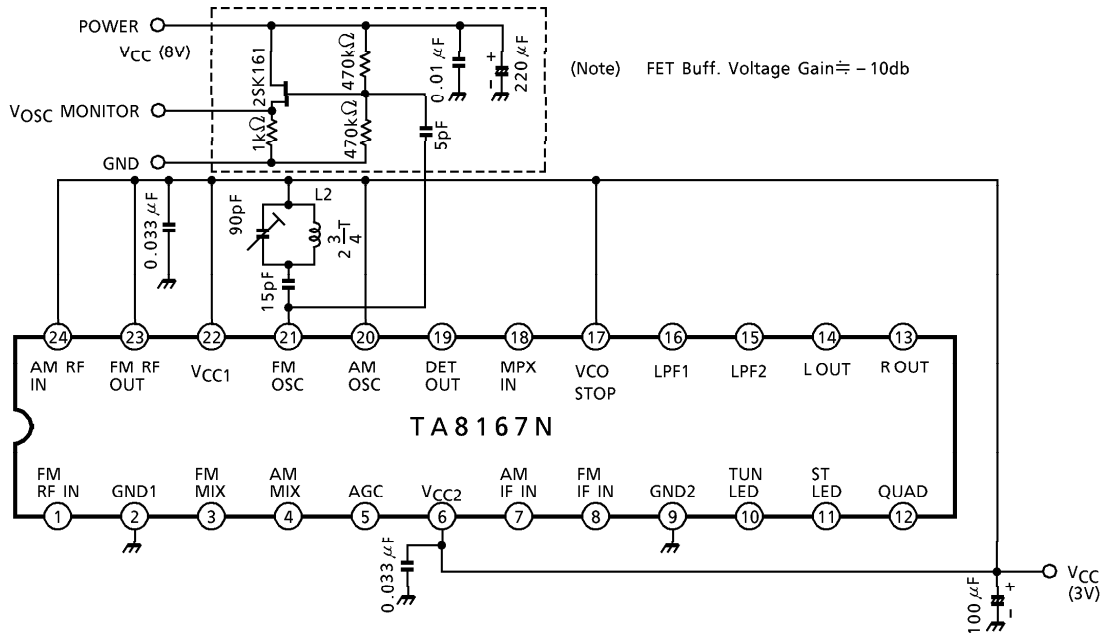

COIL DATA

| COIL No. | TEST FREQ. (Hz) | L (μH) | C ₀ (pF) | Q ₀ | TURNS | | | | | WIRE (mm φ) | REFERENCE |
|-----------------------|-----------------|--------|---------------------|----------------|-------|-----|-----------------|-----------------|-----|-------------|-----------------|
| | | | | | 1-2 | 2-3 | 1-3 | 1-4 | 4-6 | | |
| L ₁ FM RF | 100M | — | — | 100 | — | — | — | 2 $\frac{1}{2}$ | — | 0.5UEW | Ⓢ 53T-037-202 |
| L ₂ FM OSC | 100M | — | — | 100 | — | — | 2 $\frac{3}{4}$ | — | — | 0.5UEW | Ⓢ 0258-244 |
| L ₃ AM OSC | 796k | 288 | — | 115 | 13 | 73 | — | — | — | 0.08UEW | Ⓢ 4147-1356-038 |
| T ₁ FM MIX | 10.7M | — | 75 | 100 | — | — | 13 | — | 2 | 0.1UEW | Ⓢ 2153-414-041 |
| T ₂ AM MIX | 455k | — | 180 | 120 | — | — | 180 | — | 15 | 0.08UEW | Ⓢ 2150-2162-165 |
| T ₃ FM DET | 10.7M | — | 47 | 165 | — | — | 16 | — | — | 0.09UEW | Ⓢ 2153-4095-122 |

Ⓢ : SUMIDA ELECTRIC CO., LTD

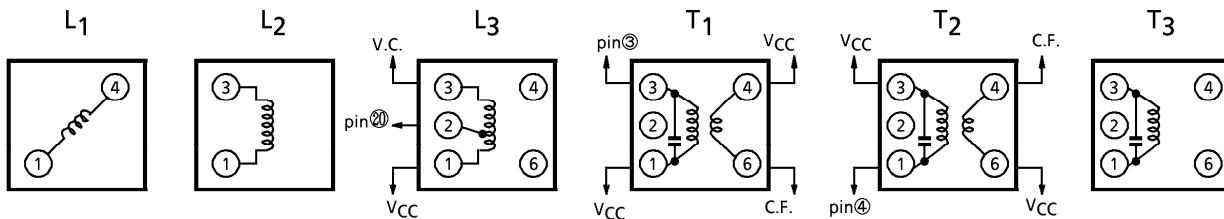

HINT ON USE OF TA8167N



○ External parts of MPX VCO

(1) Temperature characteristic of MPX VCO free-run frequency.

The temperature characteristic of MPX VCO is shown in the diagram as below.

Select one with a better temperature characteristic (C, R and VR.) in use. We recommend,

- (C : POLYESTER FILM
- (R, VR.: CARBON FILM

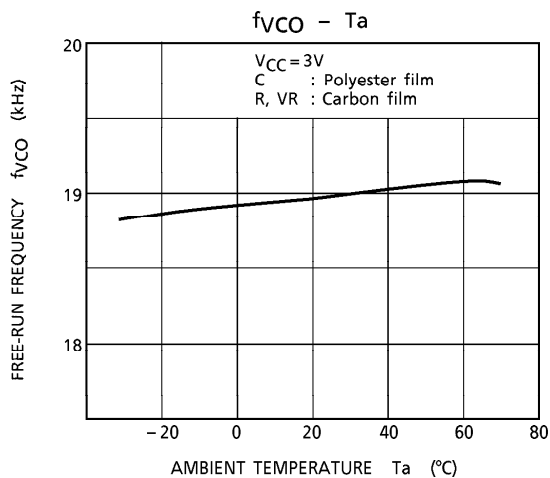


(2) Value of the external parts


We recommend to set up these value as below.

- (C = 1000pF
- (R = 12kΩ
- (VR = 10kΩ


FM (F/E + IF)
VOD, V_{no}, THD, AMR - V_{in}

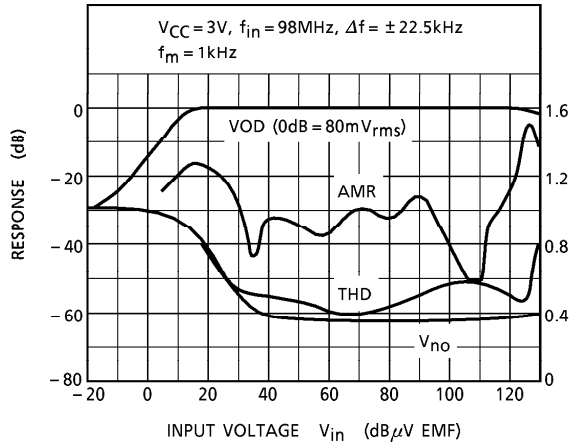


FM (IF)
VOD, V_{no}, THD, AMR - V_{in}

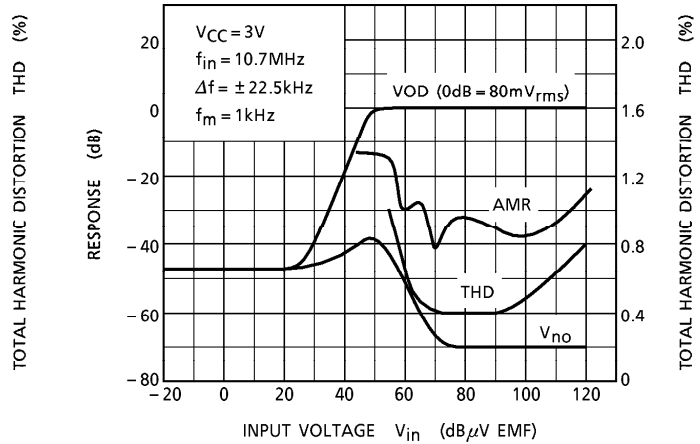


FM (IF)
VOD, THD - Δf

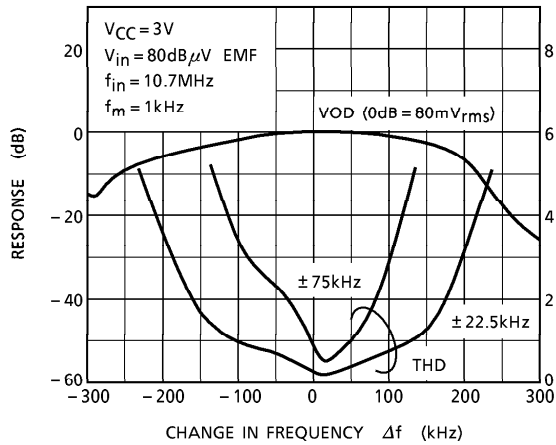


FM (IF)
VOD, V_{in} (lim) - V_{CC}






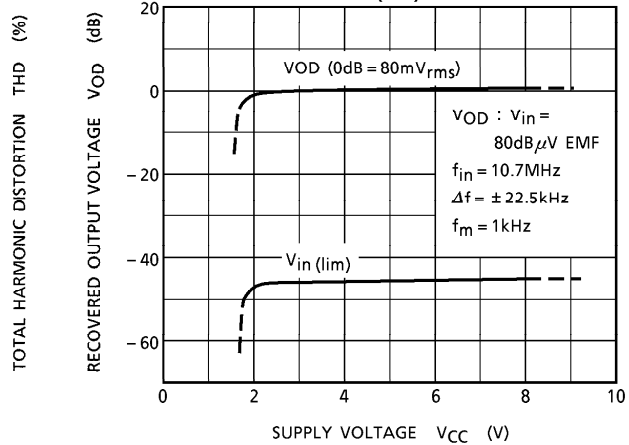





FM (IF)
VOD - T_a

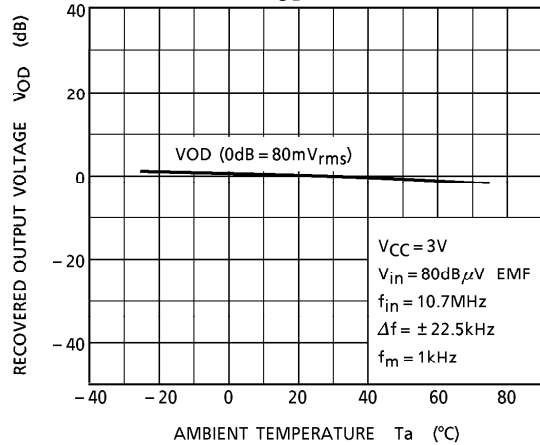

AM
VOD, V_{no}, THD - V_{in}

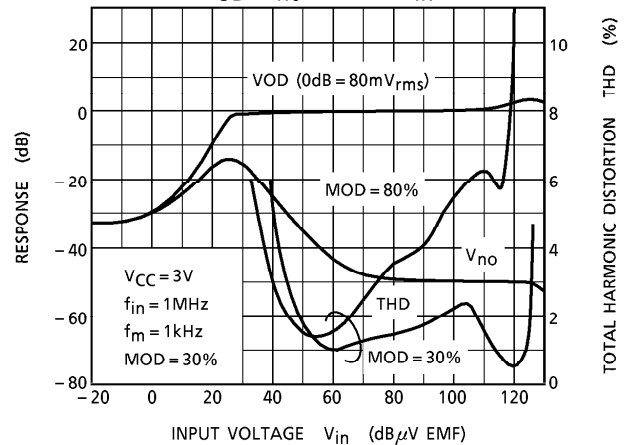


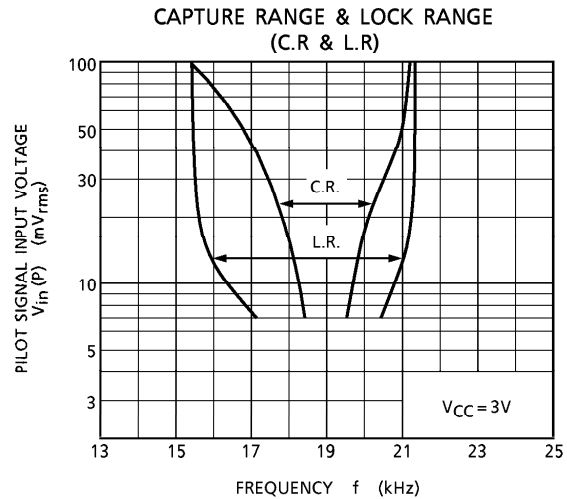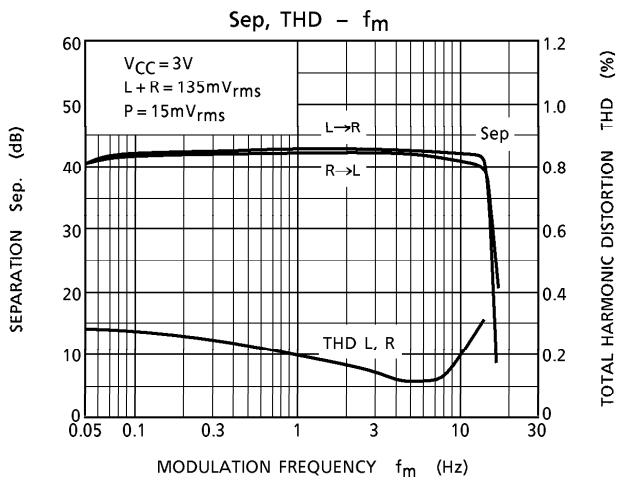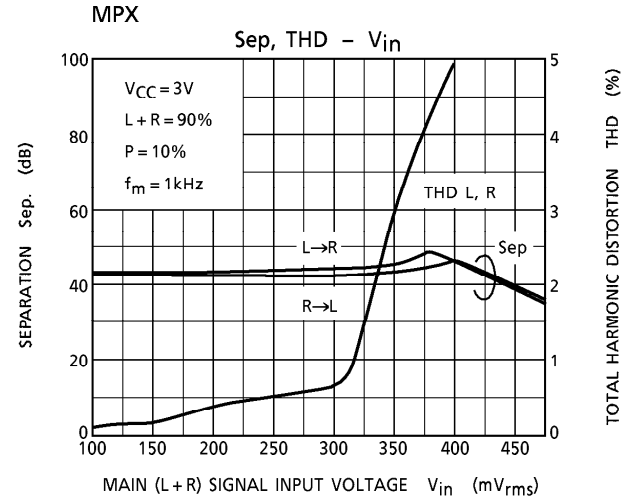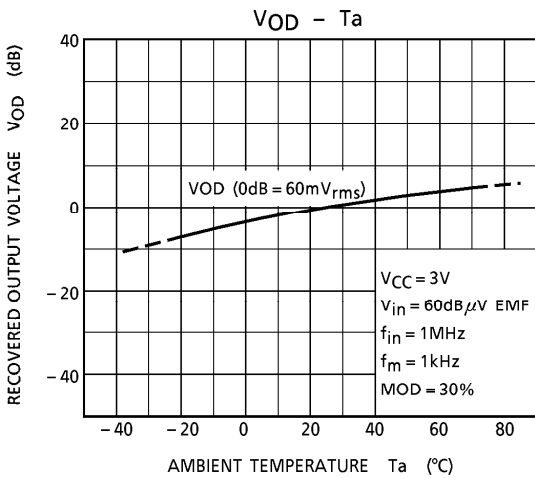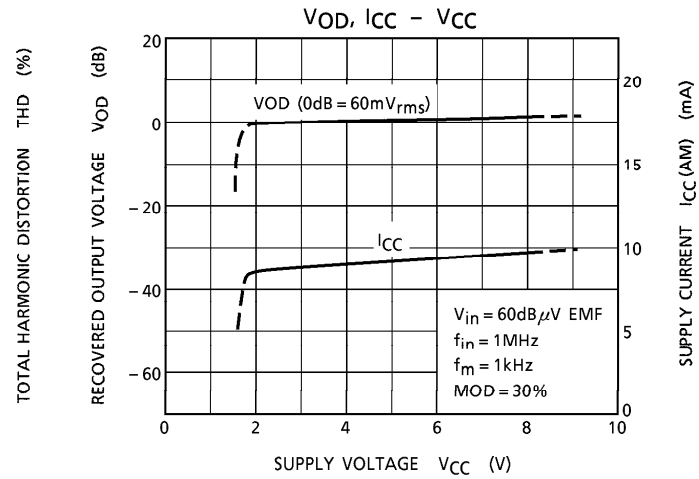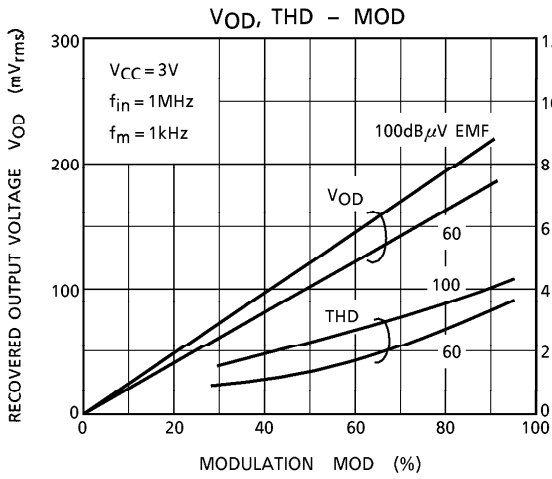

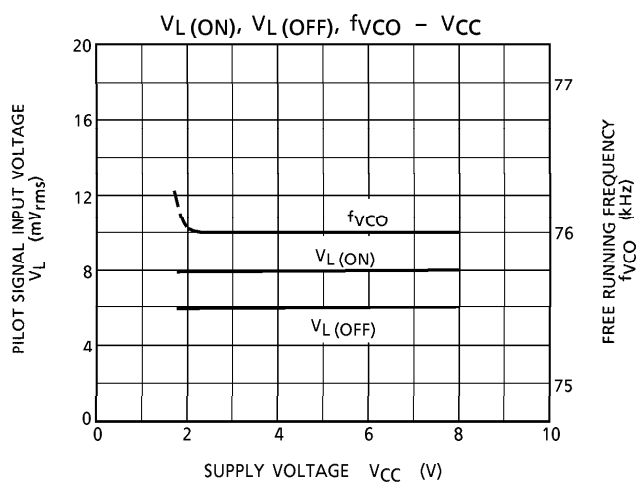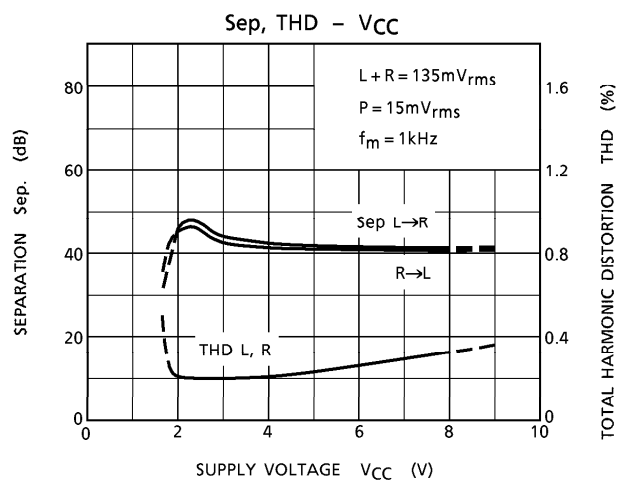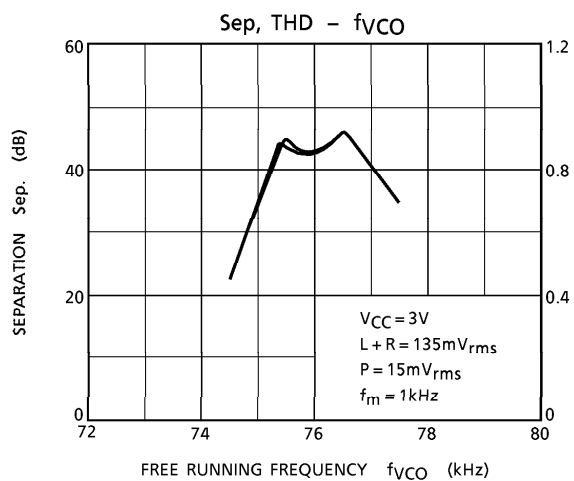

OUTLINE DRAWING
SDIP24-P-300

Unit : mm

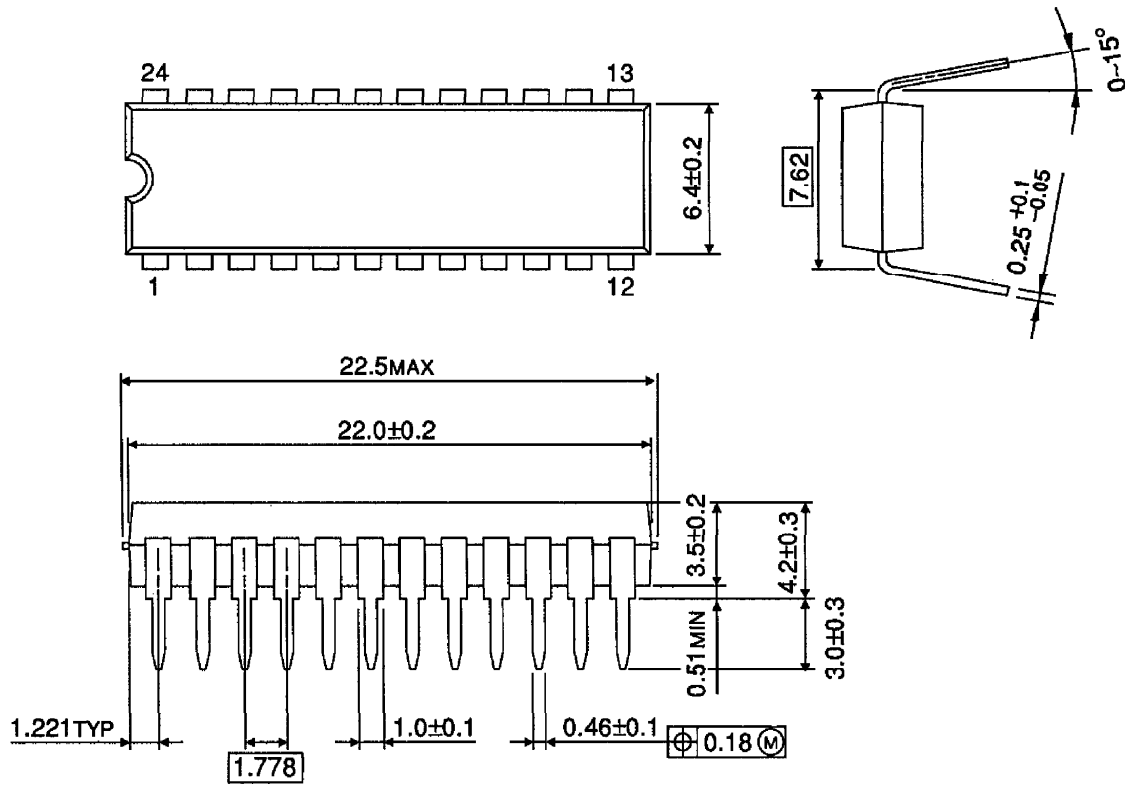

Weight : 1.2g (Typ.)

| |
|----------------------------|
| TA8167N - 14* |
| 1996 - 6 - 17 |
| TOSHIBA CORPORATION |