Low frequency transistor 2SA2018 / 2SA2030 / 2SA2119K

The transistor of 500mA class which went only into 2125 size conventionally was attained in 1608 sizes or 1208 sizes.

Applications

For switching, for muting.

Features

- 1) A collector current is large.
- 2) Collector saturation voltage is low.

 $V_{CE (sat)} \le 250 mA$


At $I_C = -200 \text{mA} / I_B = -10 \text{mA}$

● Absolute maximum ratings (Ta=25°C)

Parameter	Sy	mbol	Limits	Unit
Collector-base voltage	\	/сво	-15	V
Collector-emitter voltage	\	/ceo	-12	V
Emitter-base voltage	١	/ _{EBO}	-6	V
Collector current		lc	-500	mA
Collector current	Іср		-1	Α *
	Pc	VMT3	150	mW
Collector power dissipation		EMT3	150	
		SMT3	200	
Junction temperature	Tj		150	°C
Storage temperature	Tstg		-55 to +150	°C

^{*}Single pulse, Pw=1ms

●Dimensions (Unit : mm)

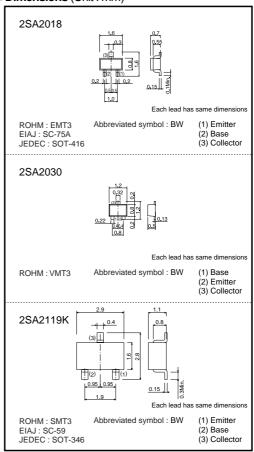

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Collector-base breakdown voltage	ВУсво	-15	_	_	V	Ic= -10μA
Collector-emitter breakdown voltage	BV _{CEO}	-12	-	_	V	I _C = -1mA
Emitter-base breakdown voltage	BV _{EBO}	-6	_	_	V	I _E = -10μA
Collector cutoff current	Ісво	_	-	-100	nA	V _{CB} = -15V
Emitter cutoff current	ІЕВО	_	_	-100	nA	V _{EB} = -6V
DC current transfer ratio	h _{FE}	270	-	680	_	V _{CE} = -2V / I _C = -10mA
Collector-emitter saturation voltage	V _{CE} (sat)	_	-100	-250	mV	I _C = -200mA / I _B = -10mA
Transition frequency	f⊤	_	260	_	MHz	V _{CE} = -2V, I _E =10mA, f _T =100MHz
Output capacitance	Cob	_	6.5	_	pF	Vcb= -10V, Ie=0A, f=1MHz

●Packaging specifications and hFE

		Package name		Taping	
Туре		Code	T146	TL	T2L
	h _{FE}	Basic ordering unit (pieces)	3000	3000	8000
2SA2119K			0	-	-
2SA2018			_	0	_
2SA2030			_	_	0

Electrical characteristic curves





Fig.1 Grounded Emitter Propagation






Fig.4 Collector-Emitter Saturation Voltage vs. Collector Current (I)




Fig.7 Gain Bandwidth Product vs. **Emitter Current**




Fig.2 Typical Output Characteristics




Fig.5 Collector-Emitter Saturation Voltage vs. Collector Current (II)




Fig.8 Collector Output Capacitance vs. Collector-Base Voltage Emitter Input Capacitance vs. Emitter-Base Voltage




Fig.3 DC Current Gain vs. Collector Current




Fig.6 Base-Emitter Saturation Voltage vs.Collecter Current

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any
 means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
 product described in this document are for reference only. Upon actual use, therefore, please request
 that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard
 use and operation. Please pay careful attention to the peripheral conditions when designing circuits
 and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
 otherwise dispose of the same, no express or implied right or license to practice or commercially
 exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp

Copyright © 2008 ROHM CO.,LTD.

ROHM CO., LTD. 21 Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan

an TEL:+81-75-311-2121 FAX:+81-75-315-0172

