

# UT6401

**Power MOSFET**



## 5A, 30V P-CHANNEL ENHANCEMENT MODE

### ■ DESCRIPTION

The UTC **UT6401** is P-channel enhancement mode Power MOSFET, designed with high density cell, with fast switching speed, low on-resistance, excellent thermal and electrical capabilities, operation with low gate charge.

This device is suitable for use as a load switch or in PWM applications.

### ■ SYMBOL

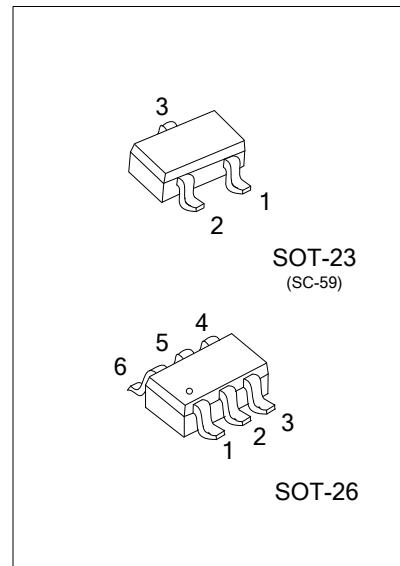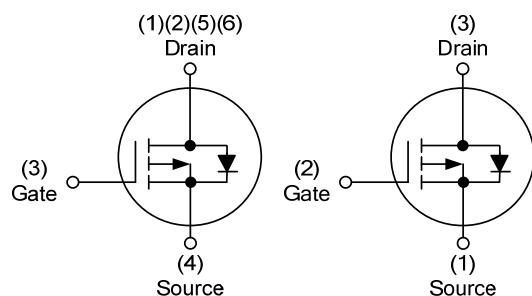


### ■ ORDERING INFORMATION

Ordering Number	Package	Pin Assignment						Packing
		1	2	3	4	5	6	
UT6401G-AE3-R	SOT-23	S	G	D	-	-	-	Tape Reel
UT6401G-AG6-R	SOT-26	D	D	G	S	D	D	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

UT6401G-AG6-R	(1)Packing Type (2)Package Type (3)Green Package	(1) R: Tape Reel (2) AG6: SOT-26, AE3: SOT-23 (3) G: Halogen Free and Lead Free
---------------	--	---

### ■ MARKING

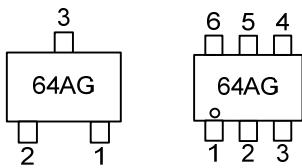

■ ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER		SYMBOL	RATINGS		UNIT
Drain-Source Voltage		$V_{DSS}$	-30		V
Gate-Source Voltage		$V_{GSS}$	$\pm 12$		
Continuous Drain Current (Note 3)		$I_D$	-5		A
Pulsed Drain Current (Note 2)		$I_{DM}$	-20		
Power Dissipation	SOT-23	$P_D$	1.38		W
	SOT-26		2		
Junction Temperature		$T_J$	+150		$^\circ\text{C}$
Storage Temperature		$T_{STG}$	-55 ~ +150		$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER		SYMBOL	MIN	TYP	MAX	UNIT
Junction to Ambient (Note 3)	SOT-23	$\theta_{JA}$			90	$^\circ\text{C}/\text{W}$
	SOT-26				110	







■ ELECTRICAL CHARACTERISTICS ( $T_J=25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
<b>OFF CHARACTERISTICS</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0\text{V}, I_D=-250\mu\text{A}$	-30			V
Drain-Source Leakage Current	$I_{DSS}$	$V_{DS}=-24\text{V}, V_{GS}=0\text{V}$			-1	$\mu\text{A}$
Gate-Source Leakage Current	$I_{GSS}$	$V_{DS}=0\text{V}, V_{GS}=\pm 12\text{V}$			$\pm 100$	nA
<b>ON CHARACTERISTICS</b>						
Gate Threshold Voltage	$V_{GS(\text{TH})}$	$V_{DS}=V_{GS}, I_D=-250\mu\text{A}$	-0.7	-1	-1.3	V
On State Drain Current	$I_{D(\text{ON})}$	$V_{DS}=-5\text{V}, V_{GS}=-4.5\text{V}$	-25			A
Static Drain-Source On-Resistance (Note 2)	$R_{DS(\text{ON})}$	$V_{GS}=-10\text{V}, I_D=-5\text{A}$		42	49	$\text{m}\Omega$
		$V_{GS}=-4.5\text{V}, I_D=-4\text{A}$		53	64	$\text{m}\Omega$
		$V_{GS}=-2.5\text{V}, I_D=-1\text{A}$		81	119	$\text{m}\Omega$
<b>DYNAMIC CHARACTERISTICS</b>						
Input Capacitance	$C_{ISS}$	$V_{GS}=0\text{V}, V_{DS}=-15\text{V}, f=1.0\text{MHz}$			943	pF
Output Capacitance	$C_{OSS}$				108	pF
Reverse Transfer Capacitance	$C_{RSS}$				73	pF
<b>SWITCHING CHARACTERISTICS</b>						
Turn-ON Delay Time (Note 2)	$t_{D(\text{ON})}$	$V_{DS}=-15\text{V}, V_{GS}=-10\text{V}, R_G=6\Omega, R_L=3\Omega$			6	ns
Turn-ON Rise Time	$t_R$				3	ns
Turn-OFF Delay Time	$t_{D(\text{OFF})}$				40	ns
Turn-OFF Fall Time	$t_F$				11	ns
Total Gate Charge (Note 2)	$Q_G$	$V_{DS}=-15\text{V}, V_{GS}=-4.5\text{V}, I_D=-5\text{A}$			9.5	nC
Gate-Source Charge	$Q_{GS}$				2.1	nC
Gate-Drain Charge	$Q_{GD}$				2.9	nC
<b>SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS</b>						
Drain-Source Diode Forward Voltage (Note 2)	$V_{SD}$	$I_S=-1\text{A}, V_{GS}=0\text{V}$			-0.75	A
Maximum Continuous Drain-Source Diode Forward Current	$I_S$				-5	A
MAXIMUN Body-Diode Pulsed Current	$I_{SM}$				-20	A





Notes: 1. Pulse width limited by  $T_{J(\text{MAX})}$

2. Pulse width  $\leq 300\text{us}$ , duty cycle  $\leq 0.5\%$ .





■ TYPICAL CHARACTERISTICS

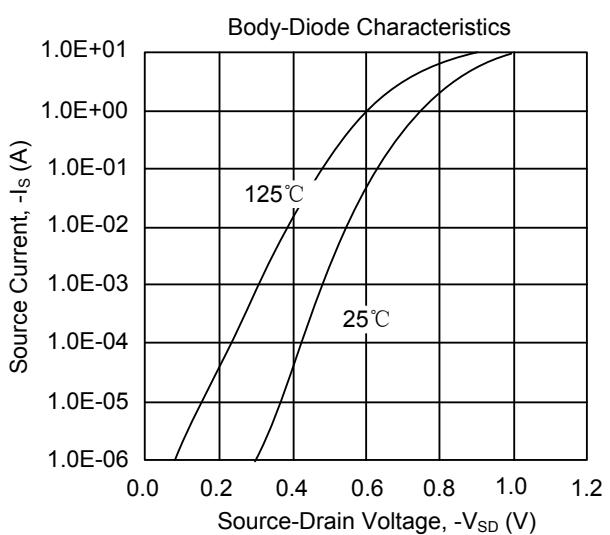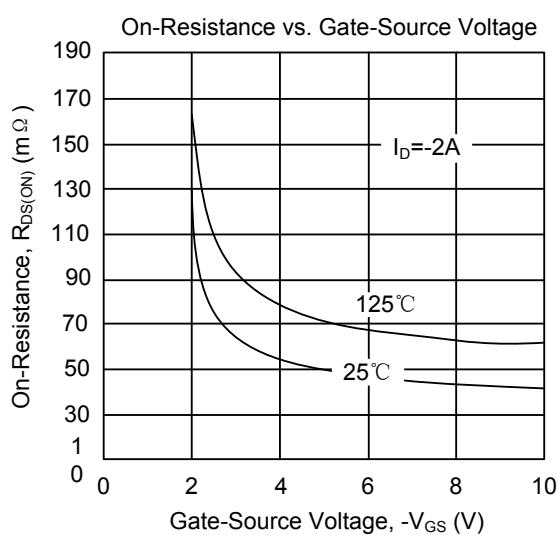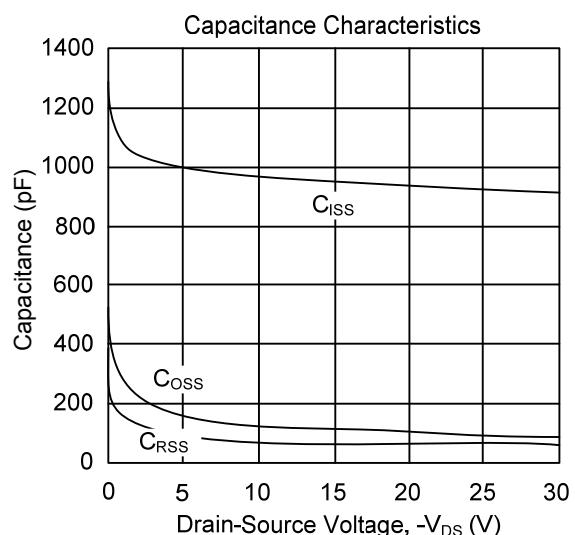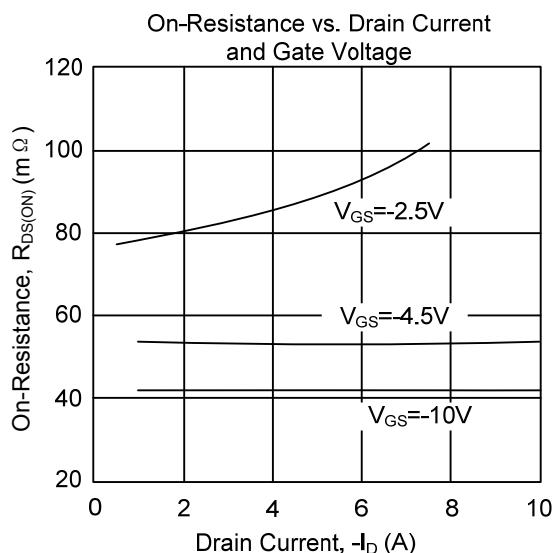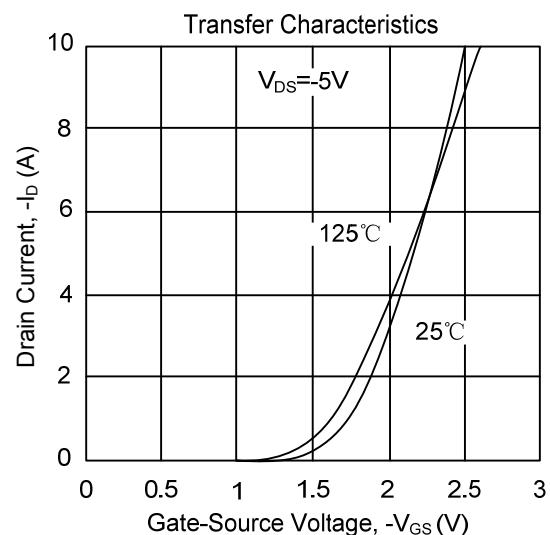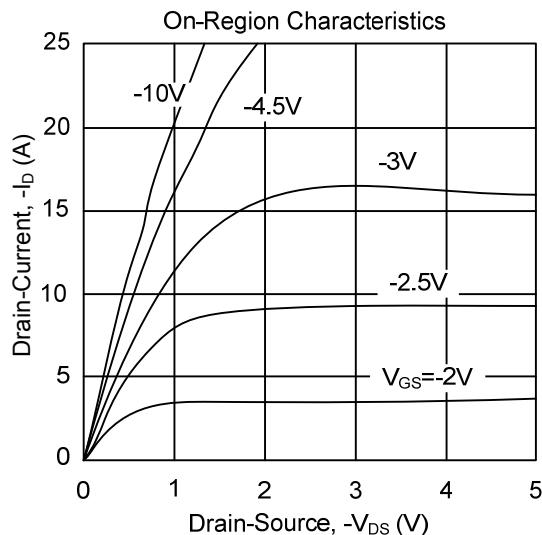

## ■ TYPICAL CHARACTERISTICS(Cont.)

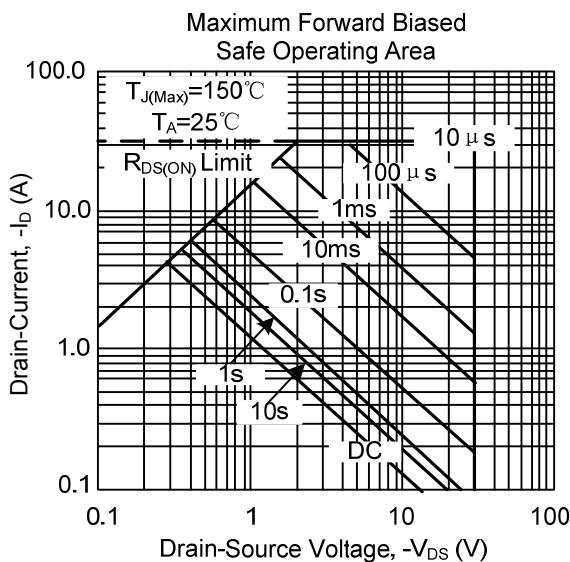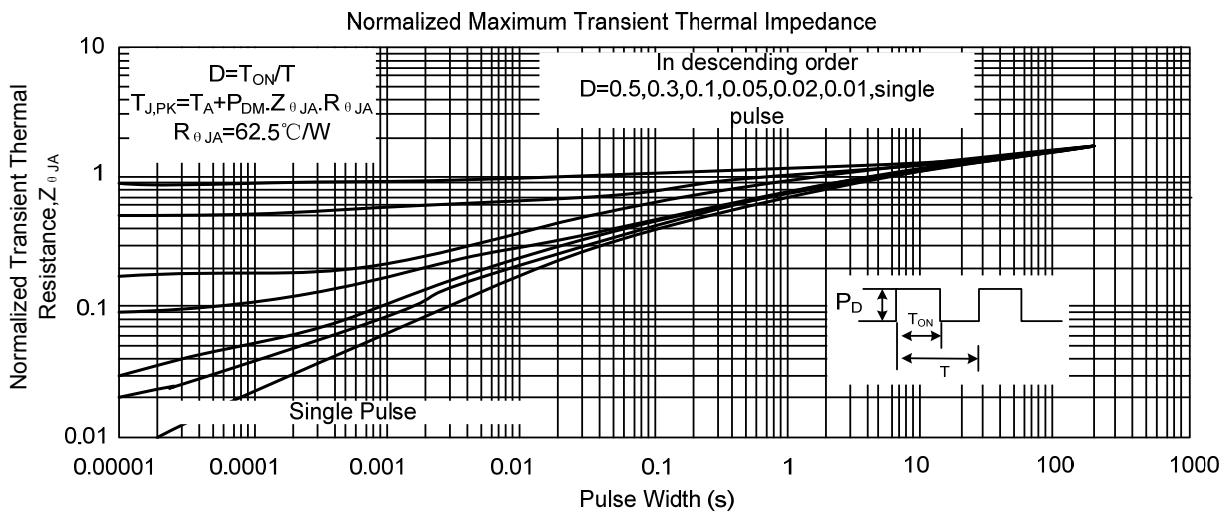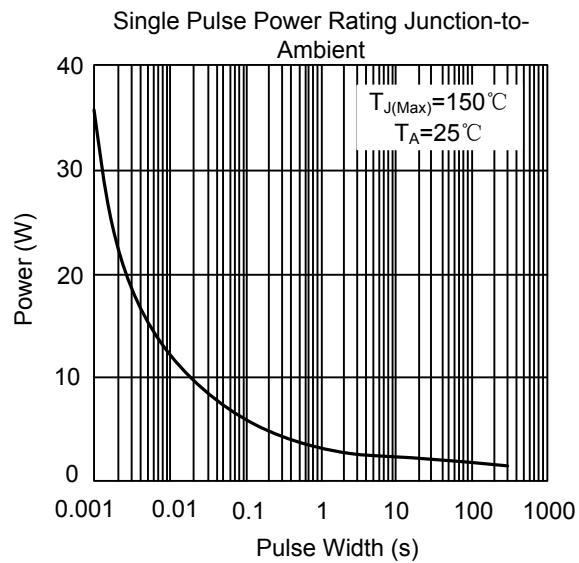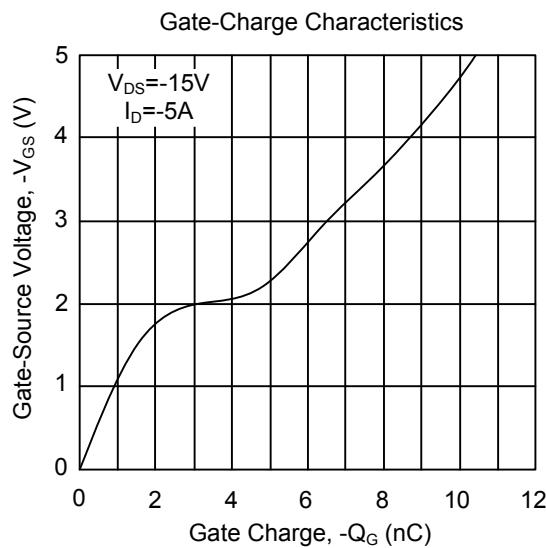

■ TYPICAL CHARACTERISTICS

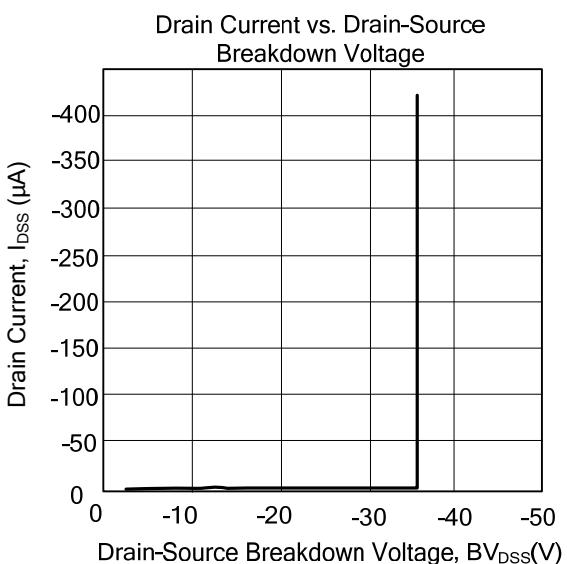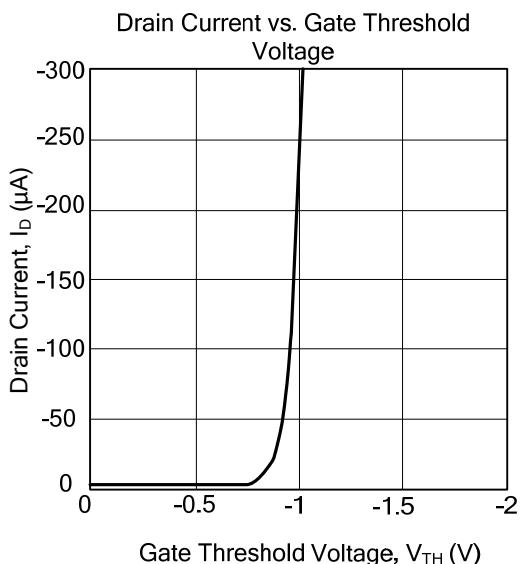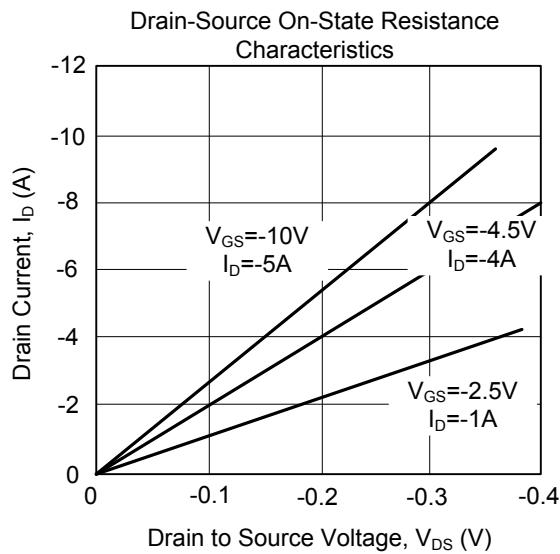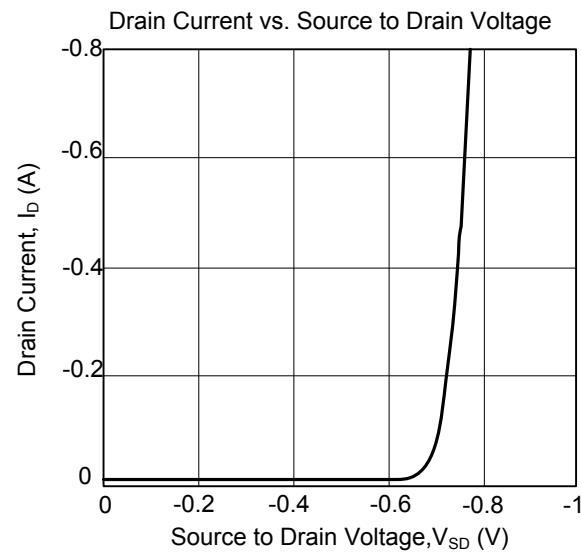

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.